

## SC4 SERIES



S5691SES



### KEY FEATURES


- 4/10 HP
- Class 30 cast iron construction
- 2" (50.8mm) NPT discharge
- Carbon/Ceramic mechanical seal
- Piggy-back style float for automatic or manual operation
- Oil-filled motor with automatic reset overload provides safe operation
- Ball bearing construction for long life
- Easily replaceable power cord with optional lengths available

### SPECIFICATIONS

**Applications:** Sewage, High-capacity Sump, Effluent  
**Capacities:** To 110 GPM (416 LPM)  
**Heads:** To 18 FT (5.5 M)  
**Cont. Liquid Temp:** 130°F (55°C)  
**Motor:** 4/10 HP (1550 RPM); Shaded pole with thermal overload  
**Electrical:** 115 Volt, 12.5FLA, 1Ph, 60Hz  
**Operation:** Tethered models  
**Min. Basin Diameter:** Simplex = 18" (457mm) Duplex = 30" (762mm)  
**Impeller:** Thermoplastic, vortex type  
**Solids Handling:** 2" (50.8mm)  
**Power Cord:** 10' (3 M) or 20' (6 M) 16-3, SJTW-A/SJTW

### MODEL NUMBER

SC440110T  
 SC440120T  
 SC440110M

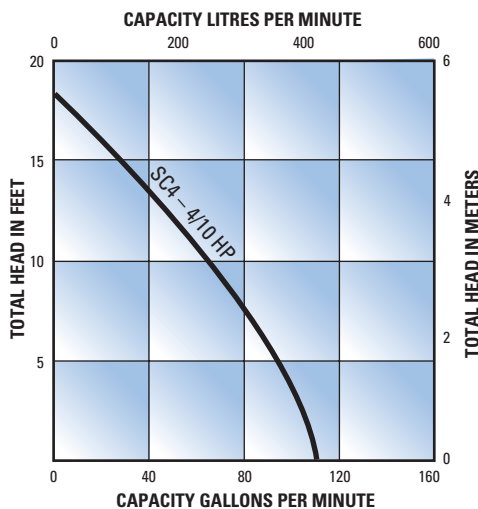

## SC5 SERIES



S3954SES



### KEY FEATURES

- 1/2 HP
- Class 30 cast iron construction
- 2" (50.8mm) NPT discharge
- Carbon/Ceramic mechanical seal
- Piggy-back style float for automatic or manual operation
- Oil-filled motor with automatic reset overload provides safe operation
- Ball bearing construction for long life
- Easily replaceable power cord with optional lengths available

### SPECIFICATIONS

**Applications:** Sewage, High-capacity Sump, Effluent  
**Capacities:** To 130 GPM (492 LPM)  
**Heads:** To 18 FT (5.5 M)  
**Cont. Liquid Temp:** 130°F (55°C)  
**Motor:** 1/2 HP (1550 RPM); Shaded pole with thermal overload  
**Electrical:** 115 Volt, 13.0FLA, 1Ph, 60Hz  
**Operation:** Tethered models or Manual models available  
**Min. Basin Diameter:** Simplex = 18" (457mm) Duplex = 30" (762mm)  
**Impeller:** Thermoplastic, vortex type  
**Solids Handling:** 2" (50.8mm)  
**Power Cord:** 10' (3 M) or 20' (6 M) 16-3, SJTW-A/SJTW

### MODEL NUMBER

SC550110T  
 SC550120T  
 SC550120M

